




**WHERE
PRECISION
DRIVES
PRODUCTION**

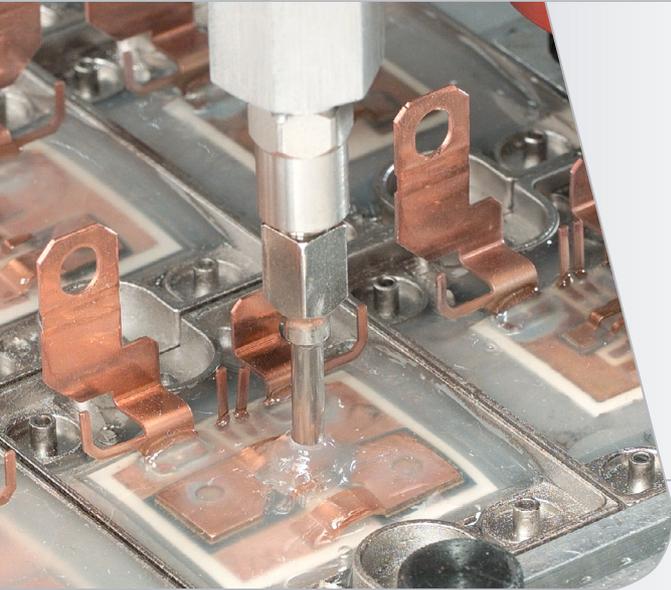

MV400 **POSITIVE DISPLACEMENT METERING VALVE**

The MV400 is an excellent solution for dot and small volume potting applications while utilizing a positive displacement metering system. The MV400 precisely measures a predetermined volume of material for highly reliable results. This valve can be used in both handheld and automated applications by integrating the head with any PVA x, y, z platform.

The MV400 has many integrated features including:

- ▲ 0.15 cc to 4.50 cc shot size
- ▲ Divorced valve design prevents fluid contamination of the air section
- ▲ Inlet and outlet check valves and positive shut off provide precise metering of material
- ▲ Adjustable flow rate
- ▲ Deposit size can be modified by altering an adjustable stroke
- ▲ Stainless steel fluid section for optimum material compatibility
- ▲ Lightweight aluminum air section

For more information on PVA's dispensing capabilities, please contact one of our sales representatives at (518) 371-2684.

PVA also offers the following options to augment your dispensing applications:

MV4-SP	MV400 spare parts kit
MV100	Positive displacement metering valve
MV200	Positive displacement metering valve
MV300	Positive displacement metering valve
PVA3000	Automated dispensing system
PVA650	Selective coating/dispensing system
PVA250	Benchtop dispensing system



SYSTEM SPECIFICATIONS

Dimensions:

229.11 mm x 121.16 mm x 41.40 mm
(9.02 in x 4.77 in x 1.63 in)

Weight:

3 lbs

Viscosity Range:

1 cps - Paste

Operating Air Pressure:

80-120 PSI

Maximum Fluid Pressure:

1200 PSI

Wetted Parts:


Anodized Aluminum, Stainless Steel,
Viton, Teflon®

Shot Size Range:

0.15 cc to 4.50 cc

15 Solar Drive
Halfmoon NY 12065
tel 518 371 2684
fx 518 371 2688
info@pva.net

Teflon® is a registered trademark of DuPont.

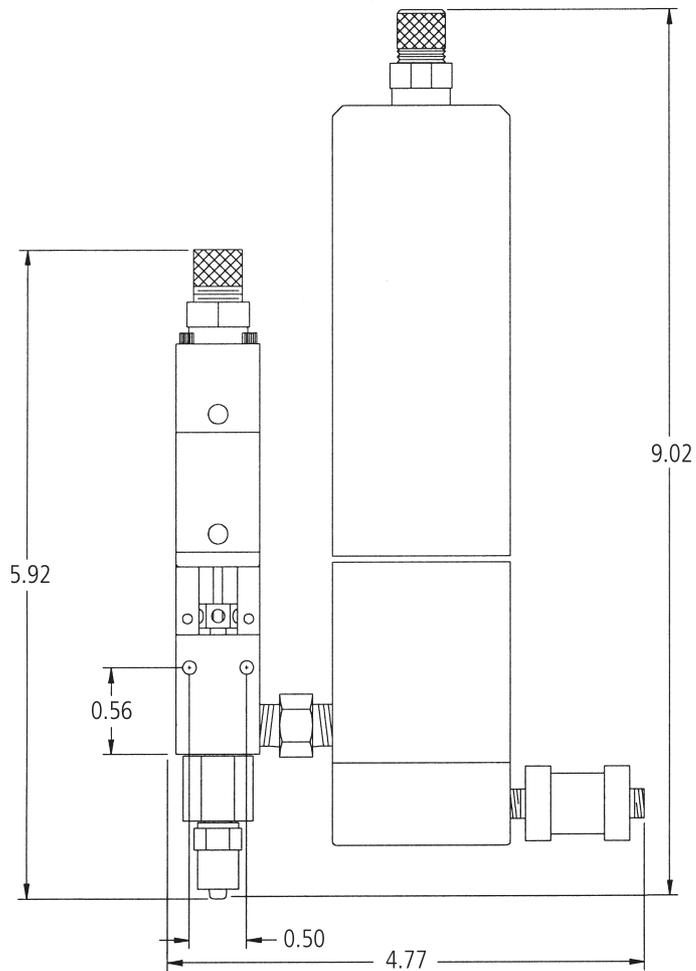

15 Solar Drive
Halfmoon NY 12065
tel 518 371 2684
fx 518 371 2688
info@pva.net