

fancort Industries, Inc.

31 FAIRFIELD PLACE

WEST CALDWELL, N. J. 07006

(973) 575-0610

WWW.FANCORT.COM

FAX (973) 575-9234

QUAD PACK SPECIFICATION SHEET

PACKAGE TYPE

TOP BRAZE




☒ X

SIDE EXIT

☐

BOTTOM EXIT

☐

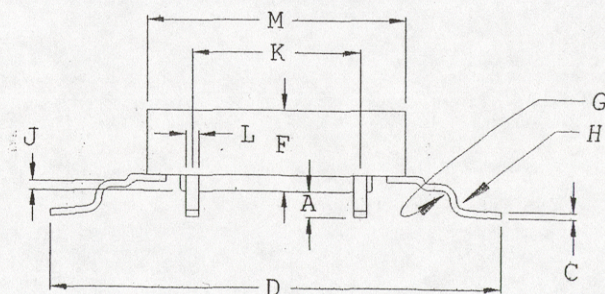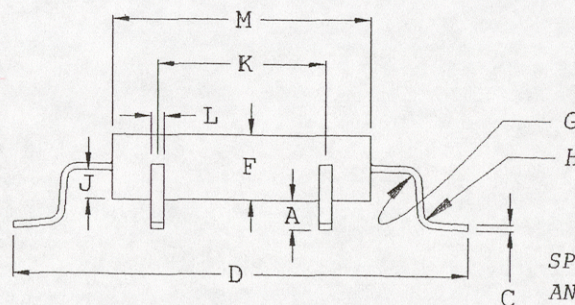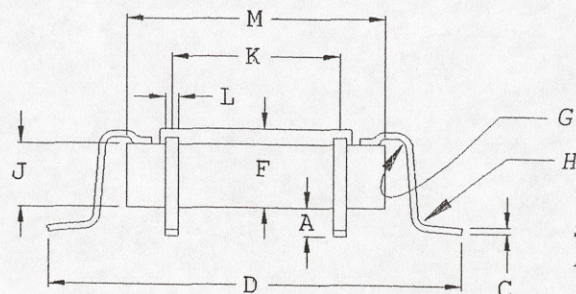

FOOT CONFIGURATIONS

SPRING BACK
ANGLE 3°-7°

OPTION 1

SPRING BACK
ANGLE 3°-7°

OPTION 2
JEDEC

FA NUMBER

CUSTOMER

PART NUMBER

ACTEL 208 CQFP

DATE

DRAWN BY FANCORT

CHECKED BY

OPTION 1

OPTION 2

	DIM X	DIM Y	TOLERANCE	+/-
A	.010	.010	.005	
C	.007	.007	MAX	
D	1.370	1.370	.010	
E	.050	.050	.005	
X	.032	.032	.005	
F	.105	.105	.015	
G	.010	.010	.002	
H	.010	.010	.002	
J	.110	.110	.015	
K	1.004	1.004	BSC	
L	.0086	.0086	MAX	
M	1.160	1.160	MAX	
PITCH	.0197	.0197		
# OF LEADS PER SIDE	52	52		
TOTAL # OF LEADS	208			

CUSTOMER SIGNATURE &

DATE FOR ACCEPTANCE

CONTROLLING UNITS ARE [METRIC ☐] INCHES ☒ X

LEADS TINNED ☐ YES ☒ NO

LEAD TYPE: FLAT ☒

PACKAGE TYPE: METAL ☐

ROUND ☐

CERAMIC ☒

UP ☒ 0°-4°

PLASTIC ☐

TOE DOWN ☐ 0°-4°

GLASS SEAL ☐