



**WHERE
PRECISION
DRIVES
PRODUCTION**



SYSTEM SPECIFICATIONS

WETTED COMPONENTS:

Valve

- Stainless Steel
- Teflon®
- Viton®

Tank

- Drop in Bottle

Material Line

- UV Safe Teflon®

MAXIMUM MATERIAL PRESSURE:

70 PSI

TANK VOLUME:

1 Liter Bottle Maximum

DISPENSE MODES:

Timed - Manual - Teach

VALVE TIP:

Luer-Lok™ Adapter

OPERATING AIR PRESSURE:

80 PSI - 100 PSI

SUPPLY VOLTAGE:

110 volt / 220 volt

FC100-1LT-1-S


Description of System Operation:

1. Bottle of material is placed in pressure pot.
2. Air pressure is applied from controller to valve.
3. Air pressure is applied to feed material to valve.
4. Flexible stand is adjusted for desired height.
5. Fluid pressure is adjusted to control flow.
6. Stroke adjuster on the valve can be adjusted for flow rate.
7. Shot timer is set for dispense mode (timed or manual).

For more information on PVA's dispensing capabilities, please contact one of our sales representatives at (518) 371-2684.

PVA also offers optional accessories for this system.

- ▲ FC1-SP, valve spare parts kit
- ▲ B62-0767-SP, system spare parts kit

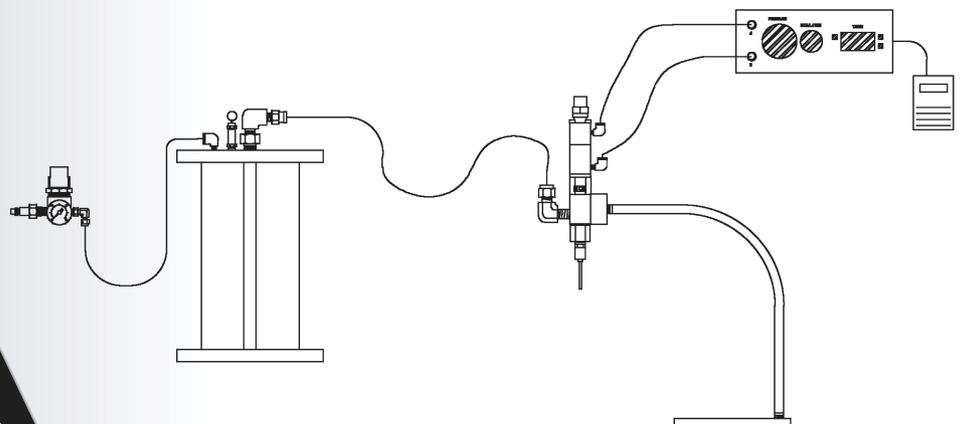

15 Solar Drive
Halfmoon NY 12065
tel 518 371 2684
fx 518 371 2688
info@pva.net

Luer-Lok™ is a Becton Dickinson and Co. trademark.
Viton® and Teflon® are registered trademarks of DuPont.